


**Product Summary**

| V _{DS} | R _{DS(ON)_MAX} | I _{D_MAX} |
|-----------------|--------------------------------|--------------------|
| 30 V | 3.4 mΩ @V _{GS} = 10V | 113 A |
| | 5.2 mΩ @V _{GS} = 4.5V | |


Features

- Low On-Resistance
- Excellent FoM (figure of merit)
- 100% ΔV_{DSD} & UIS & R_g Tested



PDFN5060-8L



Top View



Bottom View

PIN Configuration
(Top View)

Schematic Diagram

Applications

- Motor Drive
- Li-Battery Protection
- Power Management for High Performance Application

Mechanical Data

- Green Molding Compound
- Moisture Sensitivity: Level 1 per J-STD-020
- UL Flammability Classification Rating 94V-0

Ordering Information

| Orderable Part Number | Package Type | Device Marking | Form | Quantity (pcs) |
|-----------------------|--------------|----------------|---------------|----------------|
| CMN3004ALP | PDFN5060-8L | N3004AL | 13" Tape&Reel | 5,000 |

Maximum Ratings (@ T_C = 25°C, unless otherwise specified.)

| Parameter | Symbol | Value | Unit |
|---|-----------------------------------|------------|------|
| Drain - Source Voltage | V _{DS} | 30 | V |
| Gate - Source Voltage | V _{GS} | ±20 | V |
| Continuous Drain Current (V _{GS} = 10V) ⁽¹⁾ | I _D | 113 | A |
| | | 72 | A |
| Pulsed Drain Current ⁽²⁾ | I _{DM} | 453 | A |
| Single Pulse Avalanche Energy ⁽³⁾ | E _{AS} | 270 | mJ |
| Single Pulse Avalanche Current (L= 0.1mH) | I _{AS} | 38 | A |
| Power Dissipation | P _D | 74 | W |
| | | 29 | W |
| Junction & Storage Temperature Range | T _J , T _{STG} | -55 ~ +150 | °C |

Thermal Characteristics

| Parameter | Symbol | Typ. | Max. | Unit |
|--|------------------|------|------|------|
| Thermal Resistance, Junction-to-Ambient ⁽⁴⁾ | R _{θJA} | 37 | 46 | °C/W |
| Thermal Resistance, Junction-to-Case ⁽⁵⁾ | R _{θJC} | 1.3 | 1.7 | °C/W |

Electrical Characteristics (@ $T_J = 25^\circ\text{C}$, unless otherwise specified.)

| Parameter | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|---|-----------------------------|--|------|------|-----------|------------------|
| Off Characteristics⁽⁶⁾ | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(\text{BR})\text{DSS}}$ | $V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$ | 30 | - | - | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{\text{DS}} = 30\text{V}, V_{\text{GS}} = 0\text{V}$ $T_J = 125^\circ\text{C}$ | - | - | 1.0 | μA |
| Gate-Source Leakage Current | I_{GSS} | $V_{\text{GS}} = \pm 20\text{V}, V_{\text{DS}} = 0\text{V}$ | - | - | ± 100 | nA |
| On Characteristics⁽⁶⁾ | | | | | | |
| Gate Threshold Voltage | $V_{\text{GS}(\text{th})}$ | $V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$ | 1.2 | 1.7 | 2.5 | V |
| Static Drain-Source On-Resistance | $R_{\text{DS}(\text{ON})}$ | $V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$ | - | 2.7 | 3.4 | $\text{m}\Omega$ |
| | | $V_{\text{GS}} = 4.5\text{V}, I_D = 15\text{A}$ | - | 4.1 | 5.2 | $\text{m}\Omega$ |
| Forward Transconductance | g_{fs} | $V_{\text{DS}} = 5.0\text{V}, I_D = 20\text{A}$ | - | 35 | - | S |
| Diodes Forward Voltage | V_{SD} | $I_S = 2.0\text{A}, V_{\text{GS}} = 0\text{V}$ | - | 0.7 | 1.2 | V |
| Dynamic Characteristics⁽⁷⁾ | | | | | | |
| Input Capacitance | C_{iss} | $V_{\text{DS}} = 15\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$ | - | 3113 | - | pF |
| Output Capacitance | C_{oss} | | - | 353 | - | pF |
| Reverse Transfer Capacitance | C_{rss} | | - | 285 | - | pF |
| Gate Resistance | R_g | $V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 0\text{V}, f = 1\text{MHz}$ | - | 1.7 | - | Ω |
| Switching Characteristics⁽⁷⁾ | | | | | | |
| Turn-On DelayTime | $t_{\text{d}(\text{on})}$ | $V_{\text{GS}} = 10\text{V}, V_{\text{DS}} = 15\text{V}$ $I_D = 20\text{A}, R_{\text{GEN}} = 3.0\Omega$ | - | 6.0 | - | ns |
| Rise Time | t_r | | - | 31 | - | ns |
| Turn-Off DelayTime | $t_{\text{d}(\text{off})}$ | | - | 26 | - | ns |
| Fall Time | t_f | | - | 5.9 | - | ns |
| Gate Charge Characteristics⁽⁷⁾ | | | | | | |
| Total Gate Charge ($V_{\text{GS}} = 10\text{V}$) | Q_g | $V_{\text{DS}} = 15\text{V}, I_D = 20\text{A}$ $V_{\text{GS}} = 10\text{V}$ | - | 53 | - | nC |
| Total Gate Charge ($V_{\text{GS}} = 4.5\text{V}$) | Q_g | | - | 25 | - | nC |
| Gate-Source Charge | Q_{gs} | | - | 8.8 | - | nC |
| Gate-Drain Charge | Q_{gd} | | - | 7.8 | - | nC |
| Gate Plateau Voltage | V_{plateau} | | - | 2.8 | - | V |
| Drain-Source Diode Characteristics⁽⁷⁾ | | | | | | |
| Body Diode Reverse Recovery Time | t_{rr} | $I_F = 20\text{A}, dI/dt = 100\text{A}/\mu\text{s},$ $T_J = 25^\circ\text{C}$ | - | 19.0 | - | ns |
| Body Diode Reverse Recovery Charge | Q_{rr} | | - | 8.5 | - | nC |
| Diode Forward Current | I_S | $T_C = 25^\circ\text{C}$ | - | - | 89 | A |

Notes:

1. This current is chip limited, which is calculated based on R_{thjc} .
2. This current is calculated on single pulse with $10\mu\text{s}$ Pulse & Duty Cycle = 1%.
3. Defined by design, not subject to production test, E_{AS} condition: $T_J=25^\circ\text{C}, V_{\text{DD}}=15\text{V}, V_{\text{GS}}=10\text{V}, L=1.0\text{mH}$.
4. Device mounted on FR-4 substrate PC board with 2oz copper in 1inch square cooling area.
5. Thermal resistance from junction to soldering point (on the exposed drain pad).
6. Short duration pulse test used to minimize self-heating effect.
7. Defined by design, not subject to production.



Typical Electrical and Thermal Characteristics

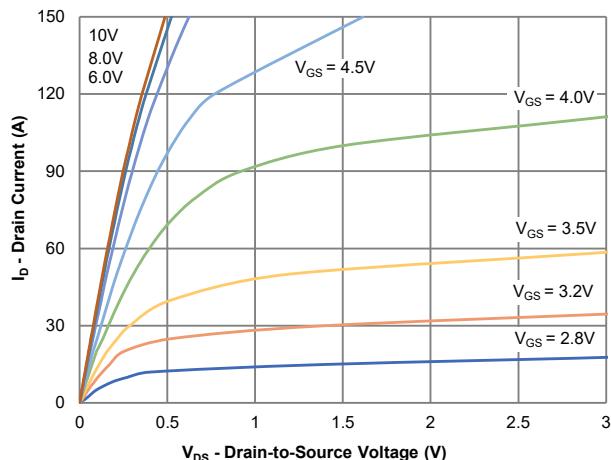


Figure 1: Output Characteristics

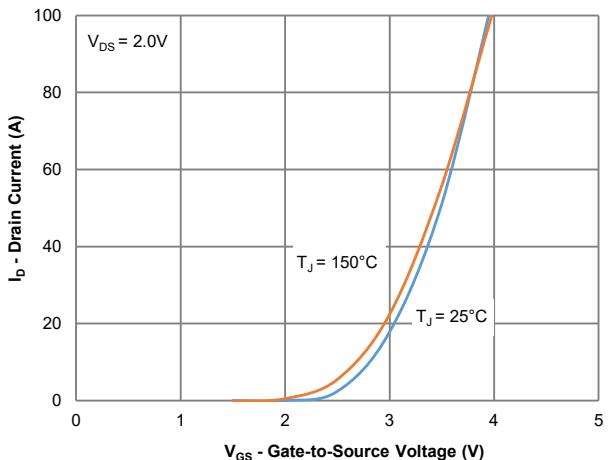


Figure 2: Transfer Characteristics

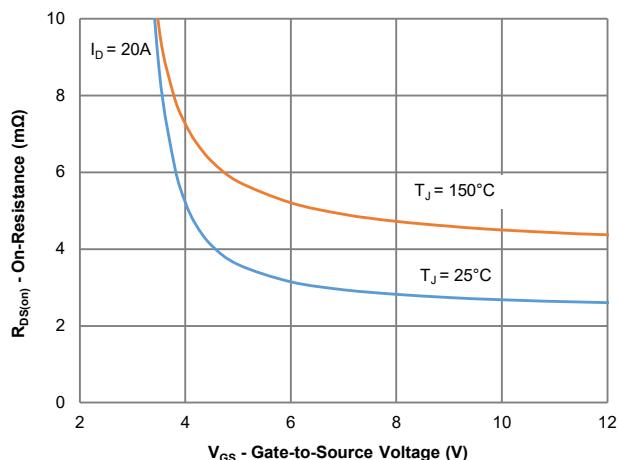


Figure 3: On-Resistance vs. Gate-Source Voltage

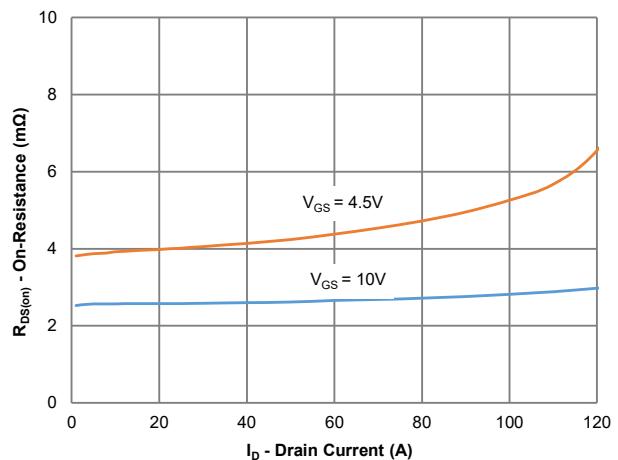


Figure 4: On-Resistance vs. Gate-Source Voltage

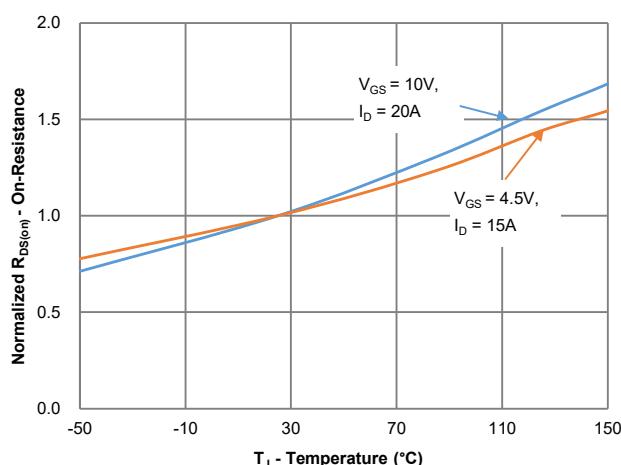


Figure 5: On-Resistance vs. Junction Temperature

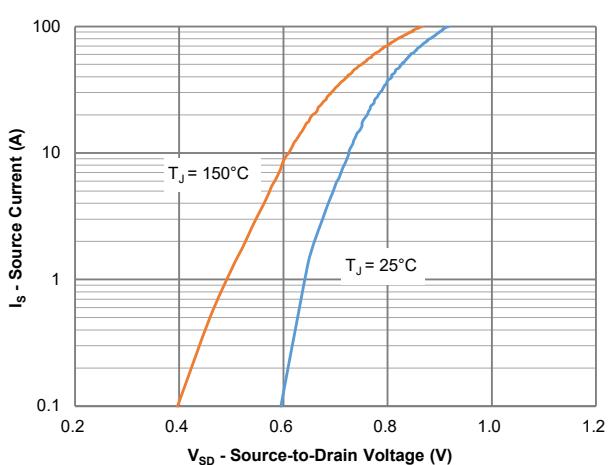


Figure 6: Source-Drain Diode Forward Voltage



CMN3004ALP

30V N-Channel Power MOSFET

Typical Electrical and Thermal Characteristics

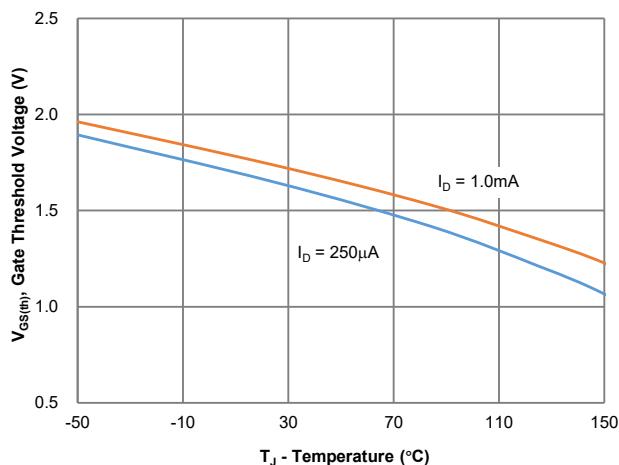


Figure 7: Gate Threshold Variation vs. Junction Temperature

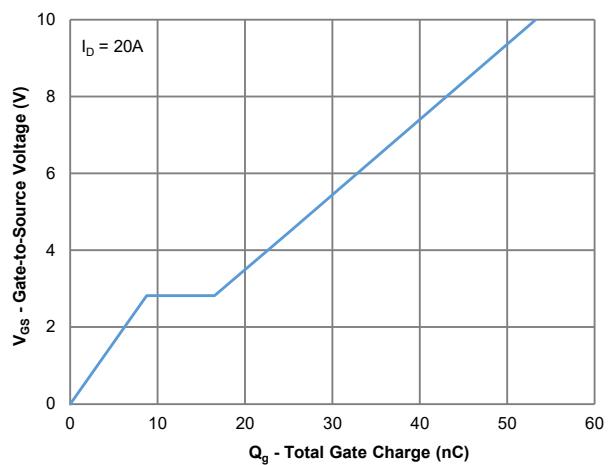


Figure 8: Gate Charge Characteristics

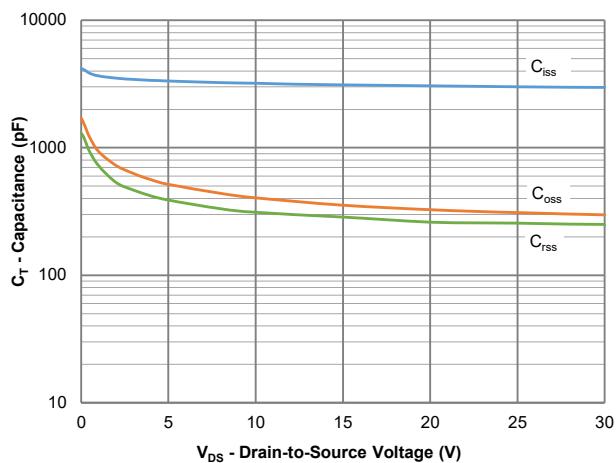


Figure 9: Capacitance Characteristics

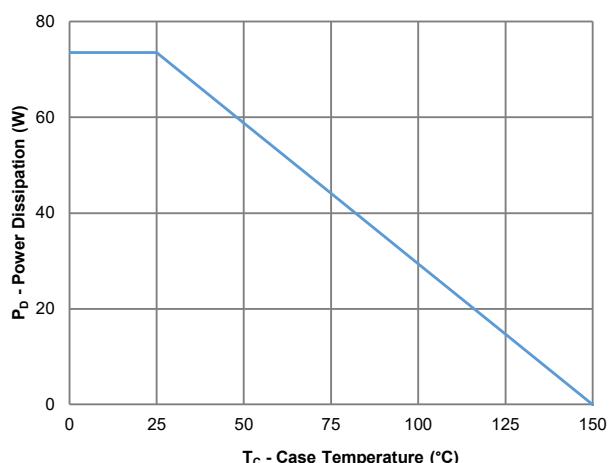


Figure 10: Power Derating

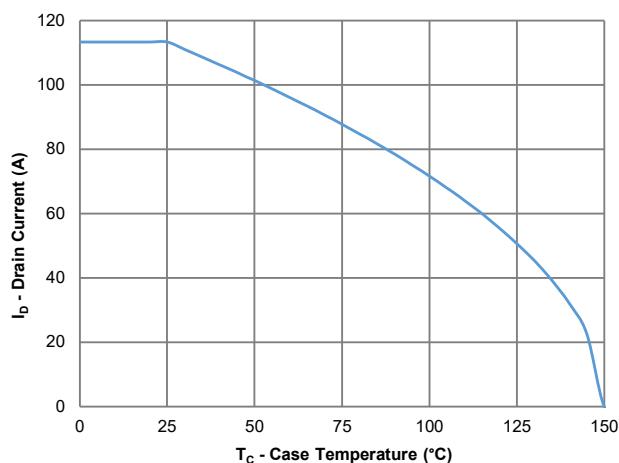


Figure 11: Current Derating

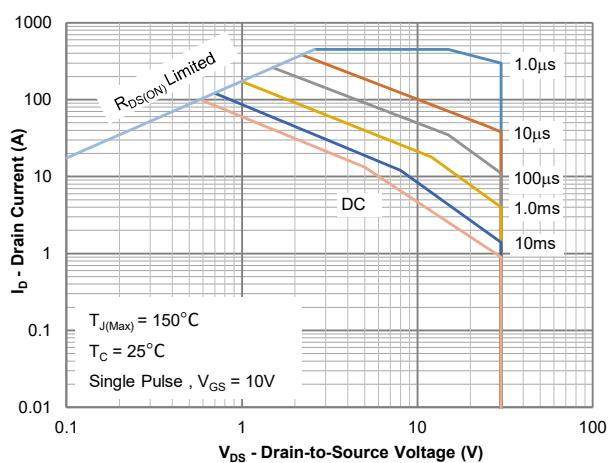


Figure 12: Safe Operating Area



Typical Electrical and Thermal Characteristics



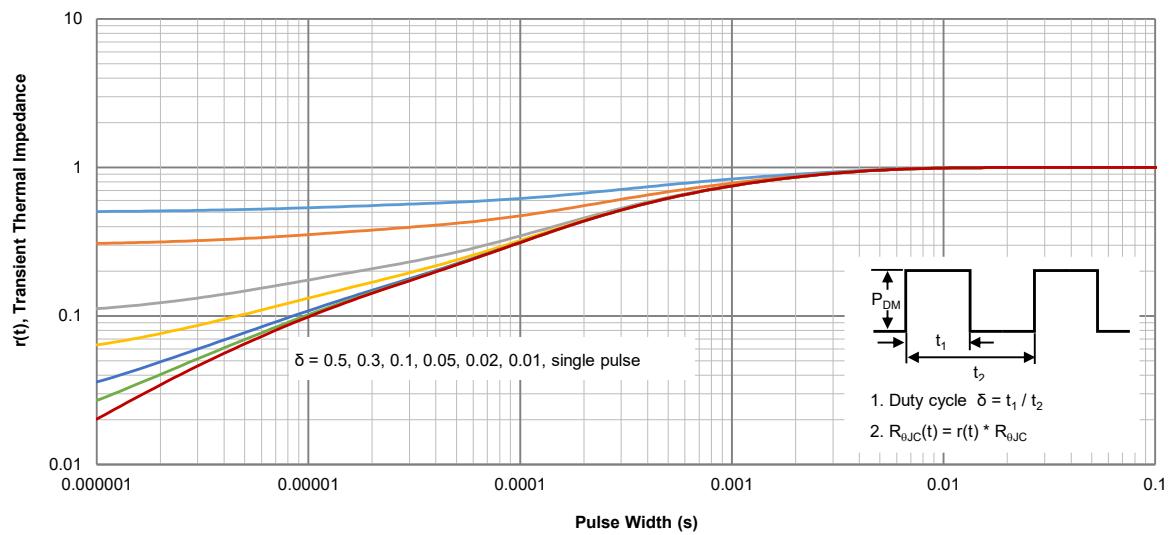


Figure 13: Normalized Maximum Transient Thermal Impedance

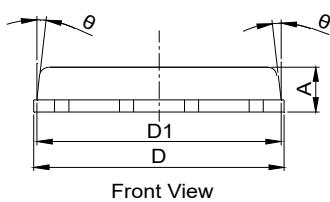

PDFN5060-8L Package Outline

Package Outline

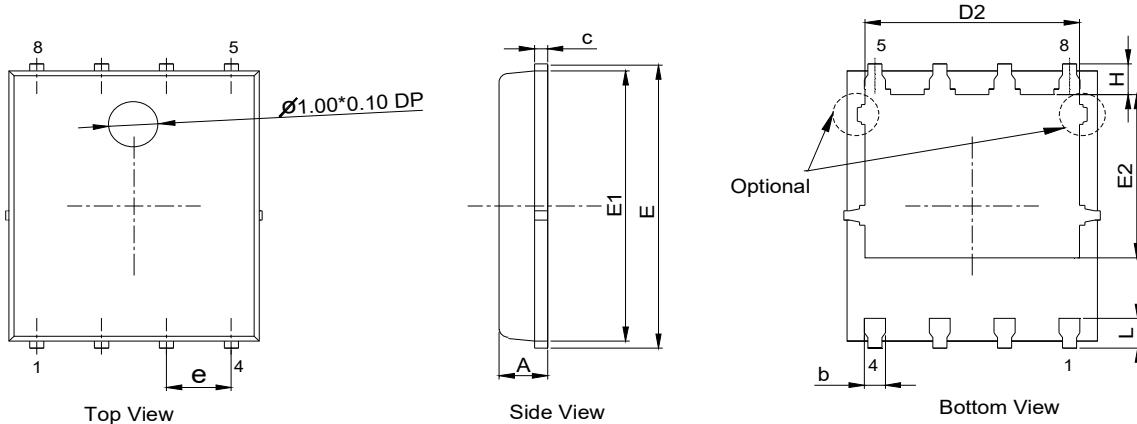


Front View

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. ALL DIMNESIONS IN MILLIMETER (ANGLE IN DEGREE).
3. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH PROTRUSIONS OR GATE BURRS.

| DIM. | MILLIMETER | | |
|------|------------|------|------|
| | MIN. | NOM. | MAX. |
| A | 0.90 | 1.05 | 1.20 |
| b | 0.20 | 0.41 | 0.51 |
| c | 0.20 | 0.25 | 0.35 |
| D | 4.80 | -- | 5.40 |
| D1 | 4.65 | -- | 5.30 |
| D2 | 3.60 | -- | 4.30 |
| E | 5.90 | -- | 6.30 |
| E1 | 5.60 | -- | 6.00 |
| E2 | 3.37 | -- | 3.92 |
| e | 1.27BSC | | |
| H | 0.40 | 0.60 | 0.75 |
| L | 0.40 | 0.60 | 0.84 |
| θ | 0° | -- | 12° |

Recommended Soldering Footprint

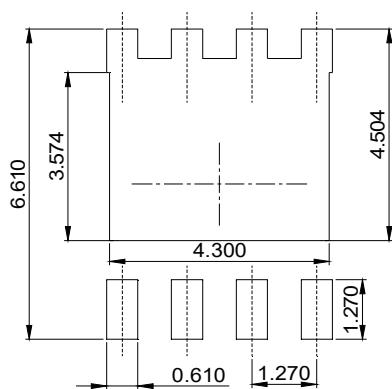

DIMENSIONS: MILLIMETERS